




LIM003

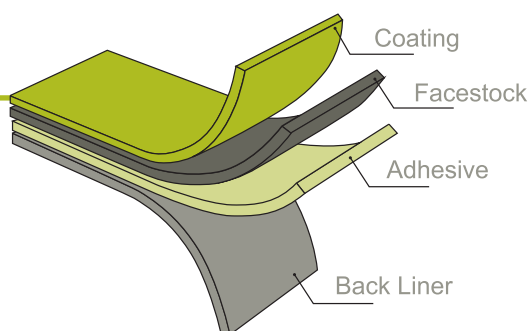

Facestock/Coating

A matt, white paper with good opacity and excellent absorption and toner bonding characteristics. The facestock is made with FSC certified pulp (FSC Mix Credit , chain-of-custody number: CU-COC-807907).

Basis Weight	70 g/m ²	ISO 536
Caliper	87 µm	ISO 534

Adhesive

A general purpose permanent, acrylic based adhesive.

Liner

Hygroflat 55, a one side coated, bleached kraft paper.

Basis Weight	55 g/m ²	ISO 536
Caliper	58 µm	ISO 534

Laminate

Total Caliper	161 µm±10%	ISO 534
---------------	------------	---------

Performance data

Initial Tack	17 N/25mm	FTM 9 Glass
Peel Adhesion 90°	7 N/25mm	FTM 2 St.St
Min. Application Temp.	0 °C	
Service temperature	-20°C to 80°C	

Adhesive performance

The adhesive is characterized by a high initial tack, excellent adhesion and good low temperature performance on a wide variety of substrates.

Application and use

This face material is designed for the manufacture of A4 sheets for use in high quality colour laserprinters, copiers, monochrome inkjet and standard quality colour inkjet printers. The surface structure provides excellent toner bonding and print resolution.

The product is ideal for label applications using variable information such as address, instruction and inventory labels, labels for office use and many other applications.

The hygroflat backing paper is specially suited to the more critical refolding demands of high-speed computer printers, providing optimum layflatness and excellent interfolding characteristics.

Conversion and Printing

Facestock is suitable for the conversion to A4 sheets with simple process printing by flexo and offset.

The material can be converted by the conventional and high-speed wide format roll-to-sheet conversion technologies. Suitable for narrow edge stripping.

The Backing paper can be printed with conventional printing methods.

Special Approvals

The adhesive complies with the European food directives and legislations, FDA 175.105 and the German recommendations XIV as published by BfR. BfR (Bundesinstitut für Risikobewertung) is the German Federal Institute for Risk Assessment. The adhesive can be used in direct contact with dry, non fatty foodstuffs.

Warranty

The above technical information, statements and recommendations are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Tasco products are warranted to be free of defects in material or workmanship for a period of one year from date of shipment. In no way will Tasco be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damage.

No express warranties and no implied warranties, whether of merchantability or fitness for any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Tasco. Tasco specifically disclaims and excludes all other such warranties. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tasco.

Tasco Gent

Industrial Park Asper - Legen Heirweg 59
9890 Gavere BE
Tel. +32 9 281 08 50
Fax +32 9 281 08 70
E-mail info@tasco.be

Tasco Lille

130, Boulevard de la Liberté
F-59000 LILLE
Tel. +33 3 62 26 00 22
E-mail info@tascofrance.fr
RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €
Site www.tascoshop.eu

Tasco Paris

13, Rue Marie Poussepain - Z.A. Lavoisier
F-91410 DOURDAN
Tel. +33 3 62 26 00 20
Fax +33 3 62 26 00 23

