




# LPE018

Product designed for wine and spirits applications. This natural white textured paper product has a particular narrow-ribbed pattern which gives the paper a hand crafted appearance and feel. It is robust and stable for embossing and die-cutting of complex label shapes and the adhesive provides good adhesion to polar surfaces.

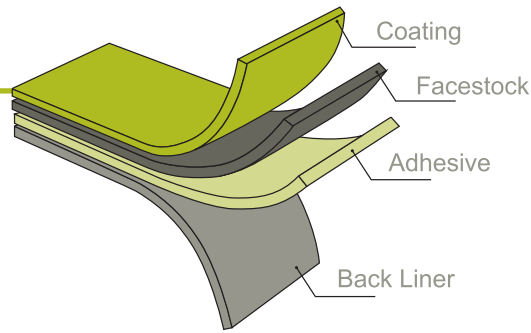

## Facestock/Coating

A white, wood-free, narrow-ribbed, machine-finished, wet-strength paper that is alkali resistant and mould proof.

Substance	90 g/m <sup>2</sup>	ISO 536
Caliper	119 µm	ISO 534
Tensile Strength MD	2,9 kN/m	ISO 1924/1
Roughness	850 mL/min	ISO 2494/1
Opacity	90%	ISO 2471
Stiffness MD	0,53 mNm	ISO/DP 2493
Stiffness CD	0,5. mNm	ISO/DP DP 2493
Printability	Suitable for flexography, offset, letterpress and screen printing methods.	
Sustainability	The product is sold as FSC Mix Credit under UPM Raflatac's FSC™ certificate SG-SCH-COC-004879.	

## Adhesive

Permanent Adhesive  
Acrylic, waterborne

Tack	15 N/25mm	FTM 9
------	-----------	-------

## Liner

White glassine woodfree backing paper.

Substance	78 g/m <sup>2</sup>	ISO 536
Caliper	68 µm	ISO 534
Tensile strength MD	7,5 kN/m	ISO 1924
Tensile strength CD	3,2 kN/m	ISO 1924
Transparency	40%	DIN 53147
Sustainability	The product is sold as FSC Mix Credit under UPM Raflatac's FSC™ certificate SG-SCH-COC-004879.	

## Performance

Total caliper	208 µm
Min labelling temperature	5 °C
Service temperature	-20 °C to 80 °C
Shelf life	From date of manufacture: 24 months, under FINAT defined storage conditions (+20-25°C and 40-50% RH). Prolonged storage at higher temperatures and/or humidity levels will shorten the shelf life.

## Information

The high stiffness of the product may result in pre-dispensing, especially if there is a narrow label feed path or if the rollers inside the machine have small diameters. Reels should be wound with the label-side out. This product is not suitable for labeling of small-diameter areas such as the neck of bottles. To ensure optimal adhesion, bottles should be dry and clean during label application. This product can be used in humid conditions and ice buckets with limited performance. Formulation contains natural rubber latex.

## Warranty

The above technical information, statements and recommendations are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Tasco products are warranted to be free of defects in material or workmanship for a period of one year from date of shipment. In no way will Tasco be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damage. No express warranties and no implied warranties, whether of merchantability or fitness for any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Tasco. Tasco specifically disclaims and excludes all other such warranties. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tasco.

### Tasco Gent

Industrial Park Asper - Legen Heirweg 59  
9890 Gavere BE  
Tel. +32 9 281 08 50  
Fax +32 9 281 08 70  
E-mail info@tasco.be

### Tasco Lille

130, Boulevard de la Liberté  
F-59000 LILLE  
Tel. +33 3 62 26 00 22  
E-mail info@tascofrance.fr  
RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €  
Site www.tascoshop.eu

### Tasco Paris

13, Rue Marie Poussepin - Z.A. Lavoisier  
F-91410 DOURDAN  
Tel. +33 3 62 26 00 20  
Fax +33 3 62 26 00 23

