




LPE028

Matte white vinyl RP37 3.2 mil white kraft.

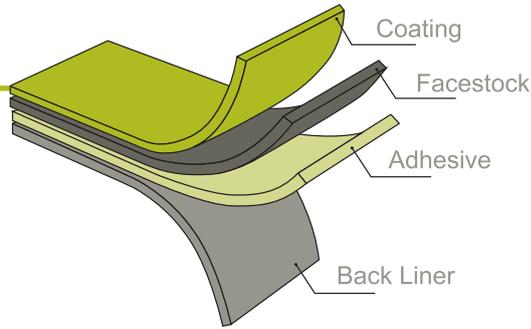

Facestock/Coating

Matte white vinyl top coated with a universal waterfast ink-jet coating.

Designed to work in all current ink-jet and hot fusion-based laser printers using dye-based, pigment, solvent and UV inks.

Substance weight	52 lbs/ream	TAPPI-410
Caliper	4.5 mil	TAPPI-411
Opacity	90%	DIN 53146/1
Additional info	Facestock contact with noxious fumes from chemicals, lift trucks, etc. should be avoided. After inject printing, the ink jet receptive coating remains absorptive to many liquids that can stain the facestock. Care should be taken to avoid facestock contact with such liquids, or the printed facestock can be covered with a protective overlamine or clear coat.	

Adhesive

Permanent, Waterborne acrylic

Designed specifically for applications requiring good initial tack and ultimate adhesion as well as good heat resistance. In combination with a clear face and a PET liner offers excellent clarity and wet out for "no label look".

Tack	11 N	FTM 9
PE-Looptack	9 N	modified FTM 9
Min. labelling temperature	-5 °C	
Service temperature min.	-28 °C	
Service temperature max.	100 °C	
Limitations	Limited adhesion at low temperatures. The highest end-use temperature must be separately checked together with the face material.	

Backing

White, one-side coated kraft liner.

For roll-to-roll labeling applications

Substance weight	52 lbs/ream	TAPPI-410
Caliper	3.2 mil	TAPPI-411

Performance

Total substance	121 lbs/ream
Total caliper	8.3 mil
Disclaimer	The performance of the product should always be tested in the actual application conditions. Our recommendations are based on our most current knowledge and experience. As our products are used in conditions beyond our control, we cannot assume any liability for damage caused through their use. Users of our products are solely responsible that the product is suitable for its intended application, and have determined such at their sole discretion. Users must comply with any applicable legislation and/or testing requirements for the finished article, and are responsible for bringing their products to market.

Warranty

The above technical information, statements and recommendations are based upon tests believed to be reliable but do not constitute a guarantee or warranty. All Tasco products are warranted to be free of defects in material or workmanship for a period of one year from date of shipment. In no way will Tasco be responsible for claims beyond the replacement value of the defective product or in any way liable or responsible for consequential or incidental damage.

No express warranties and no implied warranties, whether of merchantability or fitness for any particular use, or otherwise, except as set forth above (which is made expressly in lieu of all other warranties) shall apply to products sold by Tasco. Tasco specifically disclaims and excludes all other such warranties. No waiver, alteration, addition or modification of the foregoing conditions shall be valid unless made in writing and signed by a director of Tasco.

Tasco Gent

Industrial Park Asper - Legen Heirweg 59
9890 Gavere BE
Tel. +32 9 281 08 50
Fax +32 9 281 08 70
E-mail info@tasco.be

Tasco Lille

130, Boulevard de la Liberté
F-59000 LILLE
Tel. +33 3 62 26 00 22
E-mail info@tascofrance.fr
RCS LILLE METROPOLE B 793 237 843 - Capital : 25.000 €
Site www.tascoshop.eu

Tasco Paris

13, Rue Marie Poussepin - Z.A. Lavoisier
F-91410 DOURDAN
Tel. +33 3 62 26 00 20
Fax +33 3 62 26 00 23

